

Lo-Carbon Tempra/SELV

Single Room Heat Recovery Unit

Vent-Axia

Single Room dMVHR



Revolutionary heat recovery replacement for kitchen and bathroom fans

Features & Benefits

- Fits in 100mm diameter hole – ideal for refurbishments
- Up to 84% heat recovery
- Available in 2 wall depths: 320mm and 460mm
- Reduces the home's carbon footprint
- Choice of control options
- Suitable for refurbishment
- Summer setting
- Helps prevent noise ingress
- Continuous running or intermittent extract
- Meets current Building Regulations Approved Documents F and L
- Low SFP of 0.3W/l/s
- IPX4 rated

Low energy consumption, low noise

The unique twin impeller design consumes as little as 3.2 Watts and operates almost silently on trickle setting.

SELV for Safety

Also available in Safety Extra Low Voltage, the Tempra can fit in almost any residential application.

Versatile control

Switching on/off or from trickle to boost speeds is possible in several ways: Switched Live, Pullcord or Humidistat. Overrun and delay start timers are also available.

2 sizes available - fits walls up to 460mm

The tempra comes with 2 spigot lengths - for walls up to 320mm deep or 321 - 460mm deep.

Complies with Building Regulations Part F 2010

Complies with Part F, System 1 and may also be used in conjunction with System 3, continuous mechanical extract ventilation.

Complies with Building Regulations Part L 2010

Low energy consumption means the Tempra exceeds the energy saving requirements in Part L, Conservation of Fuel and Power.

Summer Setting

The extract-only Summer Setting helps keep you cool by closing off the intake from outside, reducing the amount of warm air entering the dwelling.



Heat Recovery Ventilation

A fan which recovers up to 80% of the heat from extracted air and puts it back into the fresh incoming air.

Fits 100mm diameter hole

The Tempra will fit 100mm through the wall applications as a straight replacement for a traditional extract fan.

Continuous or intermittent flow rates

Air flows can be set to quiet, low speed continuous rates or high speed intermittent boost rates.

Near Silent Running, Discrete, Energy Efficient Ventilation

Through-The-Wall Mounted Heat Recovery Unit

The Vent-Axia Lo-Carbon Tempra is designed to fit in 100mm diameter hole and is suitable for refurbishment, kitchen, bathroom, toilet or utility applications. The unit meets the performance requirements for continuous extract fans under the current Building Regulations Approved Document F.

The Tempra is available in three models, a P version with pullcord control, a T version with overrun timer and an HTP version with built-in pullcord, overrun timer and humidistat. Two spigot lengths are available; 320mm and 460mm.

The manual summer setting allows the unit to be set to extract only, helping to prevent a dwelling becoming too warm in hot summer conditions.

Performance

Tempra can be set to run continuously at 6 l/s or 9 l/s, boosting up to 15 l/s, recovering heat from extracted air and returning it to the dwelling. The unique, compact heat exchanger has a temperature efficiency up to 84%, saving energy and reducing your carbon footprint. For intermittent extract the Tempra is set to 15 l/s.

The Tempra is also designed so that the replacement air being introduced is at a reduced rate ensuring that the room being ventilated is still under a slight negative pressure. This ensures that fresh air is bought into the room from the rest of the house preventing humid air migrating to the rest of the house.

The Lo-Carbon ECDC motor with twin impellers consumes as little as 3.2 Watts on trickle rate and runs almost silently at only 20dB(A).

Typical Installation

The unique heat exchanger design allows the Tempra to be fitted in a 100mm diameter hole, allowing it to replace standard 100mm extract fans while giving all the benefits of heat recovery. Maximum wall thickness is 460mm.

A longer version of the Tempra is available, designed for installations where the wall thickness is between 321mm and 460mm. 460mm models are identified by an 'L'.

Models

Lo-Carbon Tempra P (Pullcord)

Constant trickle speed with pullcord to boost or intermittent operation by pullcord.

Model	Stock Ref
320mm P	443312
320mm SELV P	444368
460mm LP	403832
460mm SELV LP	403833

Lo-Carbon Tempra T (Timer)

Constant trickle speed with switch live to boost or intermittent operation by switch live.

Model	Stock Ref
320mm T	443310
320mm SELV T	444369
460mm LT	403834
460mm SELV LT	403835

Lo-Carbon Tempra HTP (Humidistat/Timer/Pullcord)

Constant trickle speed with humidistat and linked overrun timer to boost or intermittent operation by switch live.


Model	Stock Ref
320mm HTP	443311
320mm SELV HTP	444370
460mm LHTP	403836
460mm SELV LHTP	403837

Accessories

100mm High Rise Kit - 320mm white duct with black seal
Stock Ref 449011

Continuous Decentralised Ventilation - Providing comfort in our Homes

Dimensions (mm)

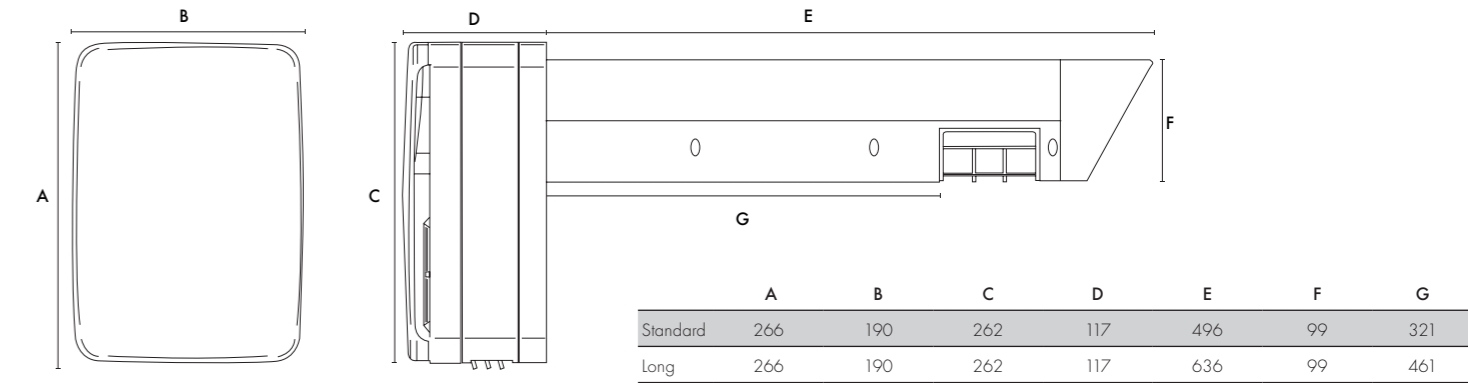


Performance

Model	Extract Performance l/s			Power Consumption Watts			Sound @dB(A)		
	Trickle Low	Trickle High	Boost	Trickle Low	Trickle High	Boost	Trickle Low	Trickle High	Boost
Lo-Carbon Tempra (All Models)	6	9	15	3.2	5.7	26.6	20	22	36

*Octave band frequency range of 250Hz to 4KHz at 3m. Unit mounted on a reflective surface.

Heat Exchange (what is heat recovery?)

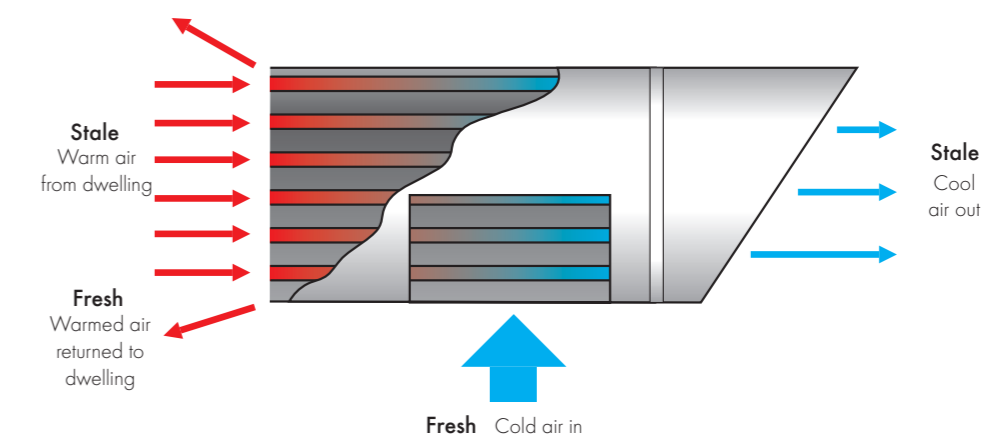



Vent-Axia
Single Room dMVHR



Continuous Decentralised Ventilation - Providing comfort in our Homes

As housing stock is being brought up to date, we now understand more about building performance than ever before. A single room heat recovery unit such as Tempra providing up to 80% heat recovery has been designed specifically for the refurbishment market. The new Tempra fits neatly into our homes via the 100mm spigot, ideal for through the wall applications to enable direct replacement to traditional extract methods.



Kitchen - Tempra

- Ideal for use through the wall
- Continuous trickle speed and integral boost complying with system 3 of Part F 2010.
- No requirement for trickle ventilators

Bathroom - Tempra

- Ideal for use through the wall
- Continuous trickle speed and integral boost complying with system 3 of Part F 2010
- Can be used as an intermittent alternative to an extract fan
- No requirement for trickle ventilators

W: www.vent-axia.com



By Appointment to H.M. The Queen
Suppliers of Unit Ventilation Equipment
Vent-Axia, Crawley, West Sussex

Vent-Axia®

VENT-AXIA CONTACT NUMBERS

Free technical, installation and sales advice is available

Sales Centre:

Domestic & Commercial


Sales Tel: 0844 856 0590
 Sales Fax: 01293 565169
 Tech Support Tel: 0844 856 0594
 Tech Support Fax: 01293 539209

Industrial

Sales Tel: 0844 856 0591
 Sales Fax: 01293 534898
 Tech Support Tel: 0844 856 0595
 Tech Support Fax: 01293 455197
 Web: www.vent-axia.com
 Email: sales@vent-axia.com

Supply & Service

All sales made by Vent-Axia Limited are made only upon the terms of the Company's Conditions of Sale, a copy of which may be obtained on request. As part of the policy of continuous product improvement Vent-Axia reserves the right to alter specifications without notice.



A British company supporting British manufacturing
Vent-Axia Group Ltd Products you can trust

402280/0313

CI/SfB

| 577 |

3rd Edition



Lo-Carbon Tempra - Up to 84% heat recovery



Single Room Heat Recovery

Vent-Axia® Lo-Carbon™